

OPENING FRAME GLASS		16 3/4"	20 11/16"	24 5/8"	28 9/16"	32 1/2"	36 7/16"	40 3/8"	48 1/4"	56 1/8"	64"	71 7/8"	
		[425]	[525]	[625]	[725]	[825]	[925]	[1025]	[1225]	[1425]	[1625]	[1825]	
		15 3/4"	19 11/16"	23 5/8"	27 9/16"	31 1/2"	35 7/16"	39 3/8"	47 1/4"	55 1/8"	63"	70 7/8"	
		[400]	[500]	[600]	[700]	[800]	[900]	[1000]	[1200]	[1400]	[1600]	[1800]	
		10 11/16"	14 5/8"	18 9/16"	22 1/2"	26 7/16"	30 3/8"	34 5/16"	42 3/16"	50 1/16"	57 15/16"	65 13/16"	
		[272]	[372]	[472]	[572]	[672]	[772]	[872]	[1072]	[1272]	[1472]	[1672]	
FIXED UNITS ONLY													
16 3/4"	10 11/16"												
20 11/16"	14 5/8"												
24 5/8"	18 9/16"												
32 1/2"	26 7/16"												
36 7/16"	30 3/8"												
40 3/8"	34 5/16"												
48 1/4"	42 3/16"												
56 1/8"	50 1/16"												
60 1/16"	54"												
64"	57 15/16"												
71 7/8"	65 13/16"												
77 3/4"													
Egress Note: Ec = Window meets the 2006 Ontario Building Code where each such window shall provide an individual, unobstructed open portion having a minimum area of 3.8ft² (0.35m²) with no dimensions less than 15" (380mm). E1 = Window has an individual, unobstructed open portion of no less than 20" (508mm) in width, 24" (610mm) in height and a minimum area of 5.0ft² (0.46m²). E2 = Window has an individual, unobstructed open portion of no less than 20" (508mm) in width, 24" (610mm) in height and a minimum area of 5.7ft² (0.53m²). ∅ = Operating unit comes standard with a sash limiting device.													
OPERATING OR FIXED UNITS													

Egress Note:

Ec = Window meets the 2006 Ontario Building Code where each such window shall provide an individual, unobstructed open portion having a minimum area of 3.8ft² (0.35m²) with no dimensions less than 15" (380mm).

E1 = Window has an individual, unobstructed open portion of no less than 20" (508mm) in width, 24" (610mm) in height and a minimum area of 5.0ft² (0.46m²).


E2 = Window has an individual, unobstructed open portion of no less than 20" (508mm) in width, 24" (610mm) in height and a minimum area of 5.7ft² (0.53m²).

∅ = Operating unit comes standard with a sash limiting device.

OPERATING OR FIXED UNITS


SCALE: 6" = 1'-0"

VERTICAL SECTION

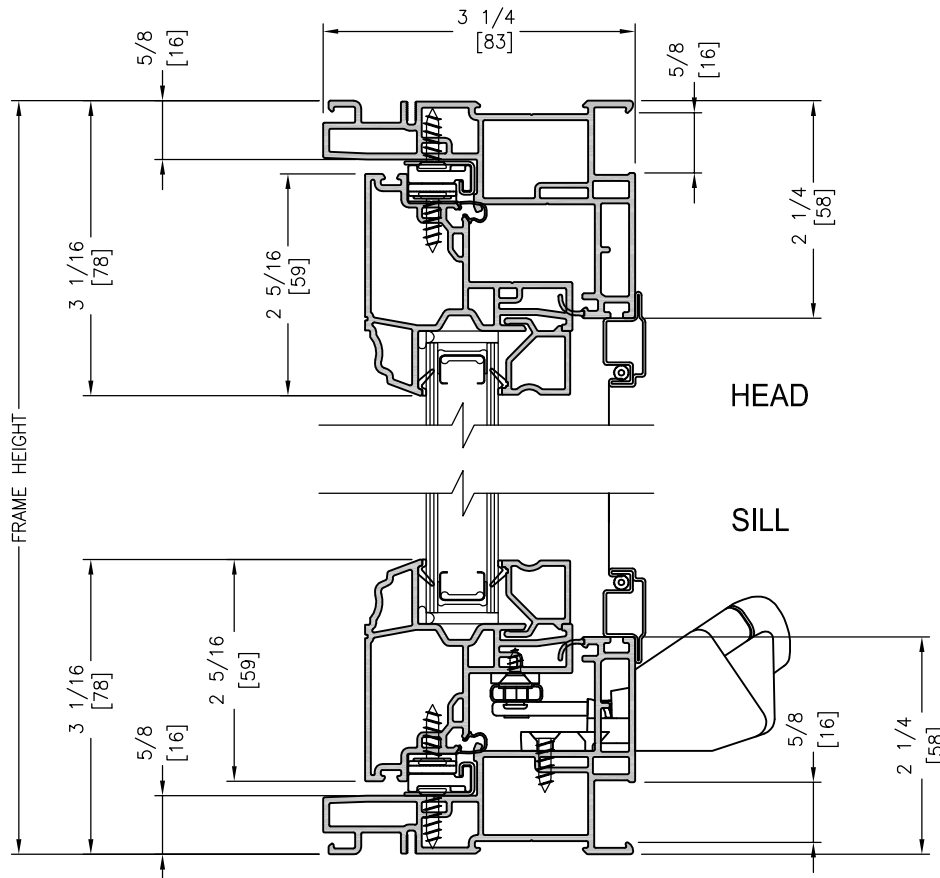


SCALE: 6" = 1'-0"

HORIZONTAL SECTION

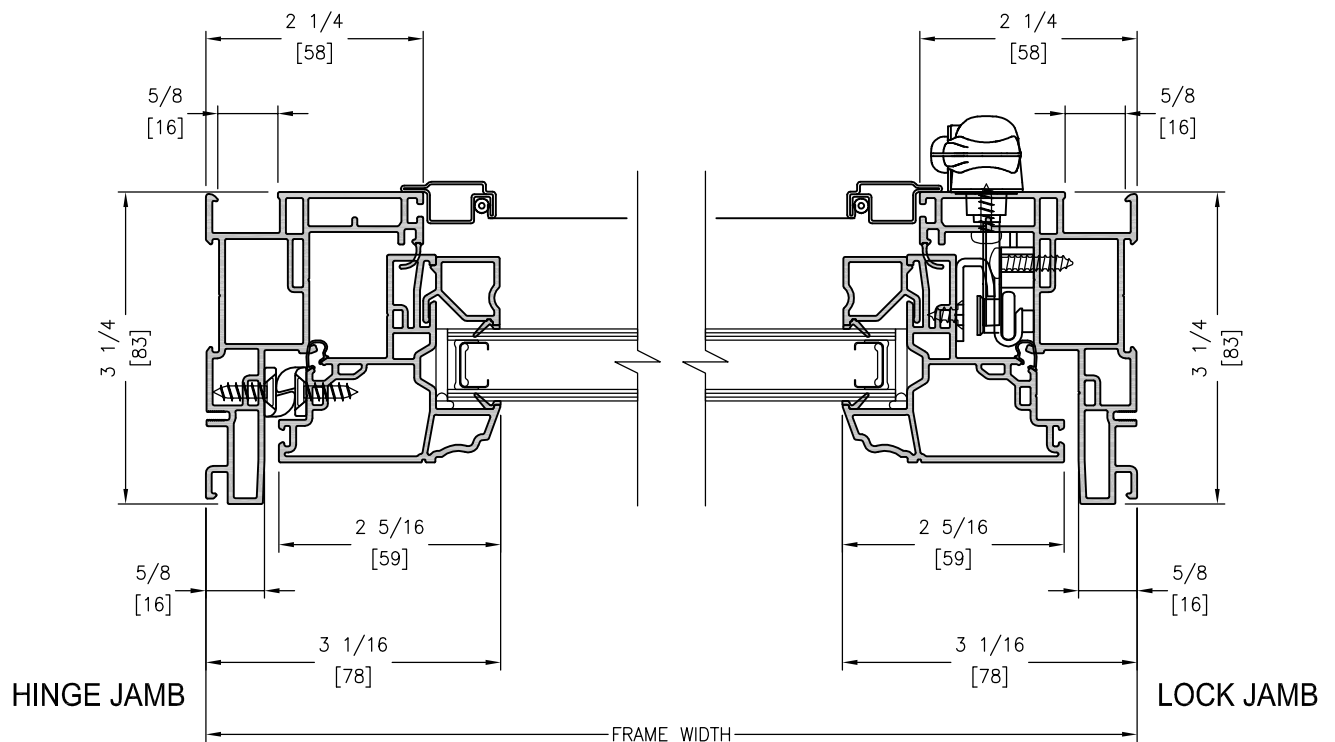


SCALE: 6" = 1'-0"

VERTICAL SECTION

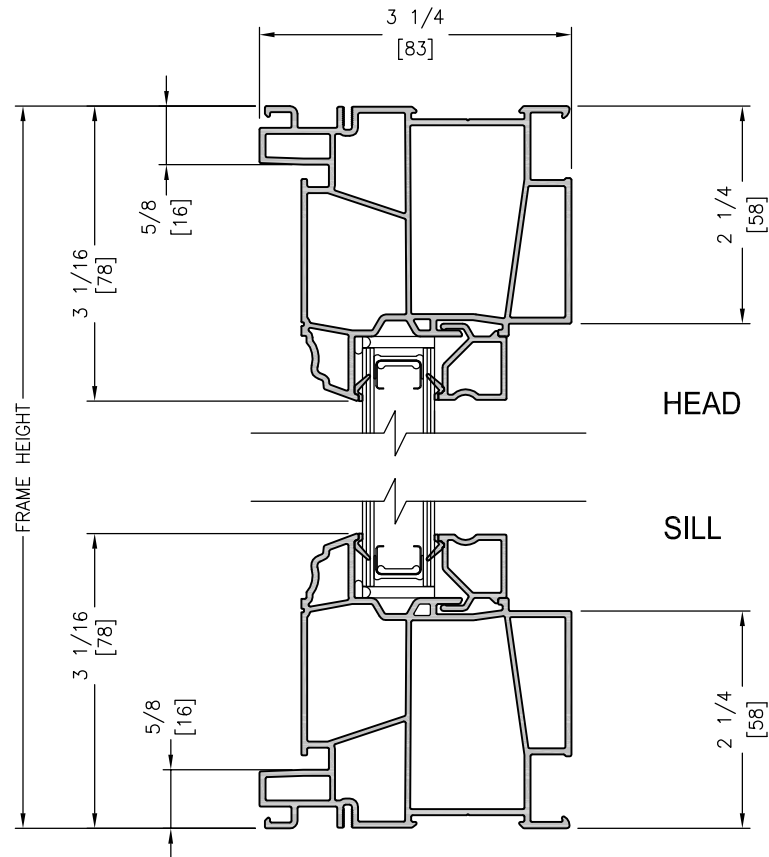



SCALE: 6" = 1'-0"

HORIZONTAL SECTION

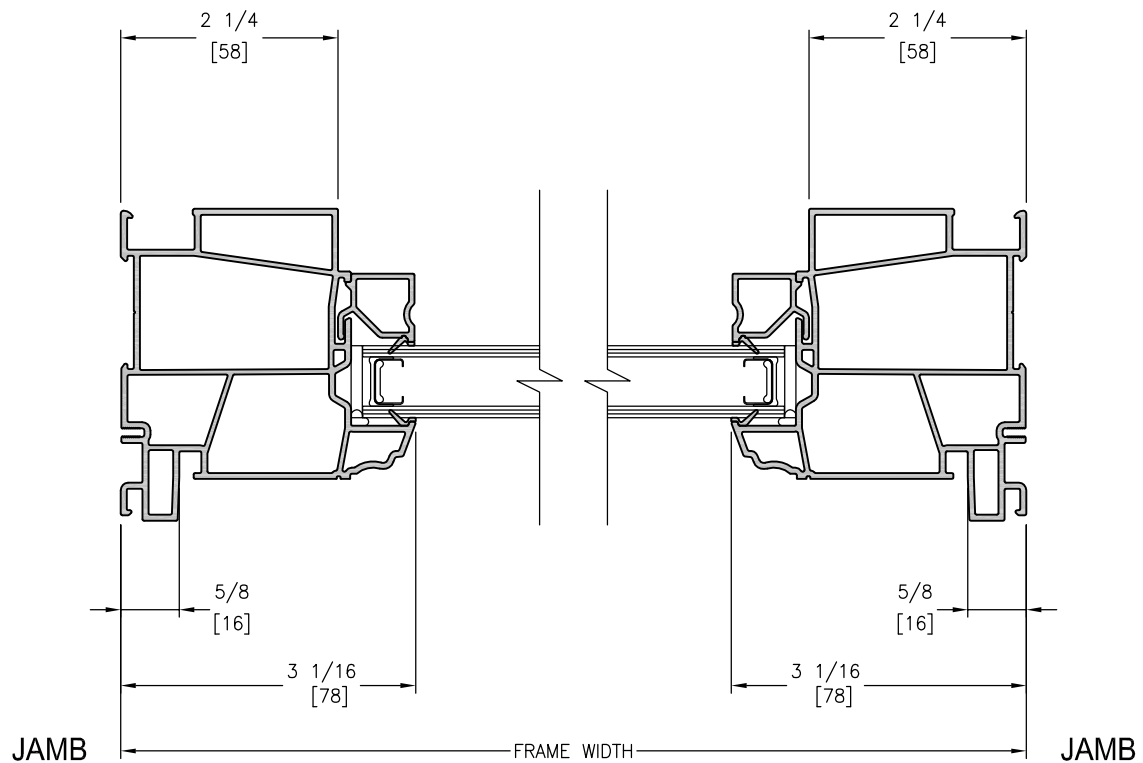



SCALE: 3" = 1'-0"

VERTICAL JOINING MULLIONS

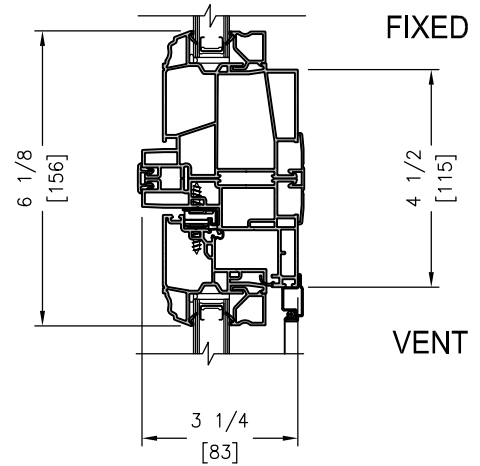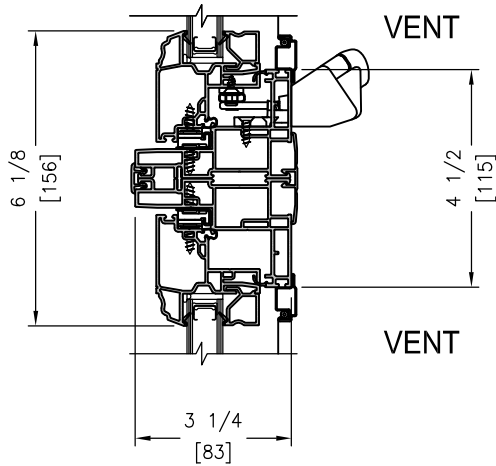



SCALE: 3" = 1'-0"

HORIZONTAL JOINING MULLIONS

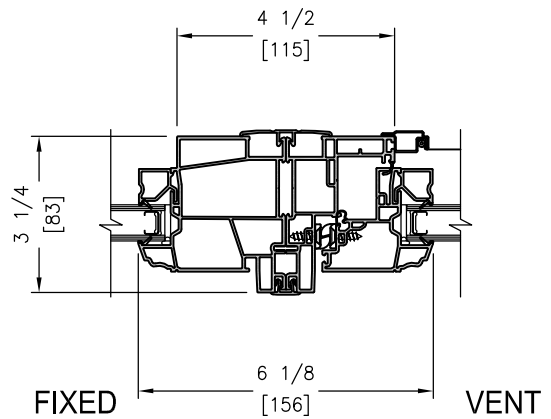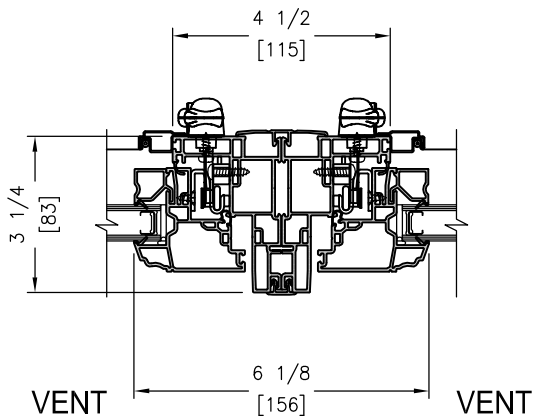


SCALE: 3" = 1'-0"

DIRECT SET TO CASEMENT

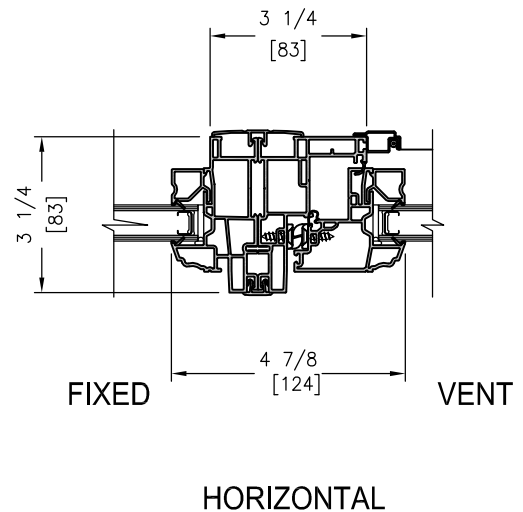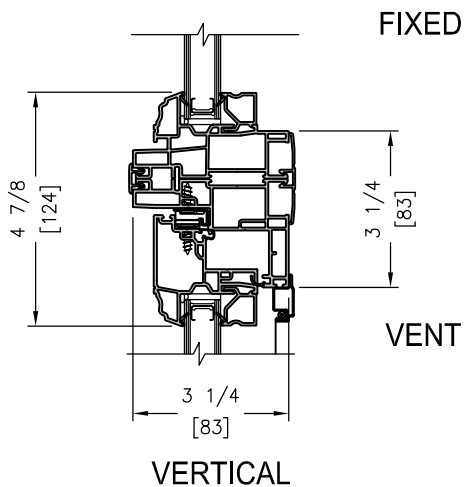

SCALE: 3" = 1'-0"

BAY WINDOW HORIZONTAL SECTIONS

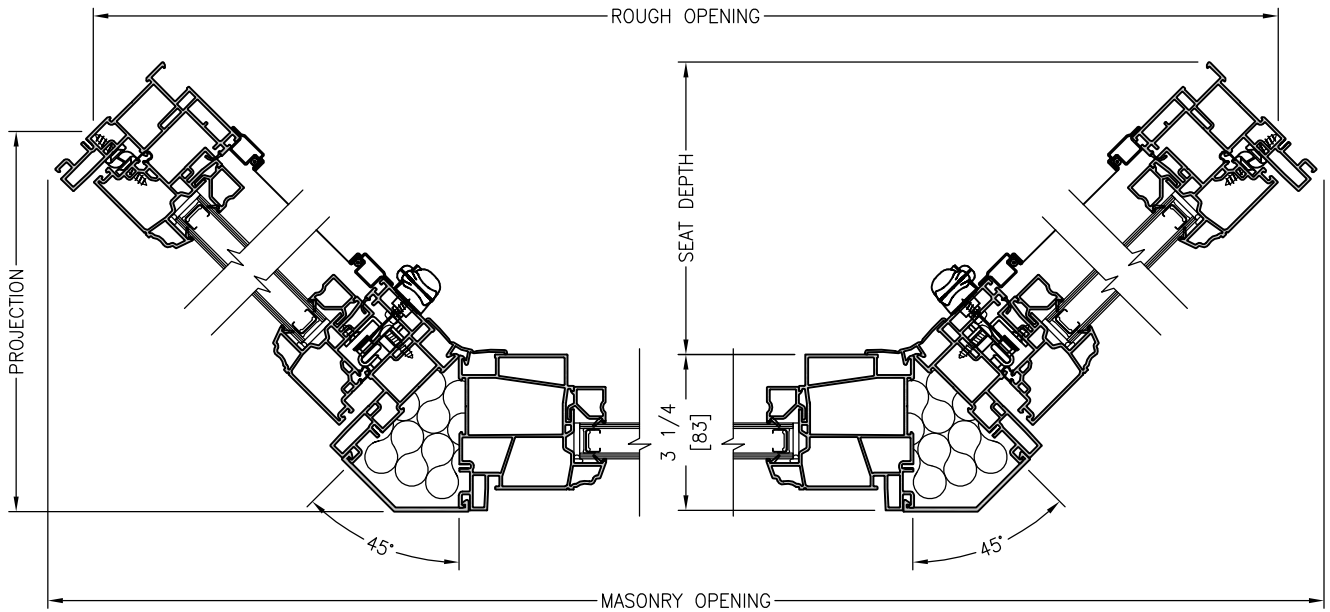


45° BAY WINDOW
HORIZONTAL SECTION
(SHOWN)

30° BAY WINDOW
HORIZONTAL SECTION

SCALE: 3" = 1'-0"

10° BOW WINDOW HORIZONTAL SECTIONS

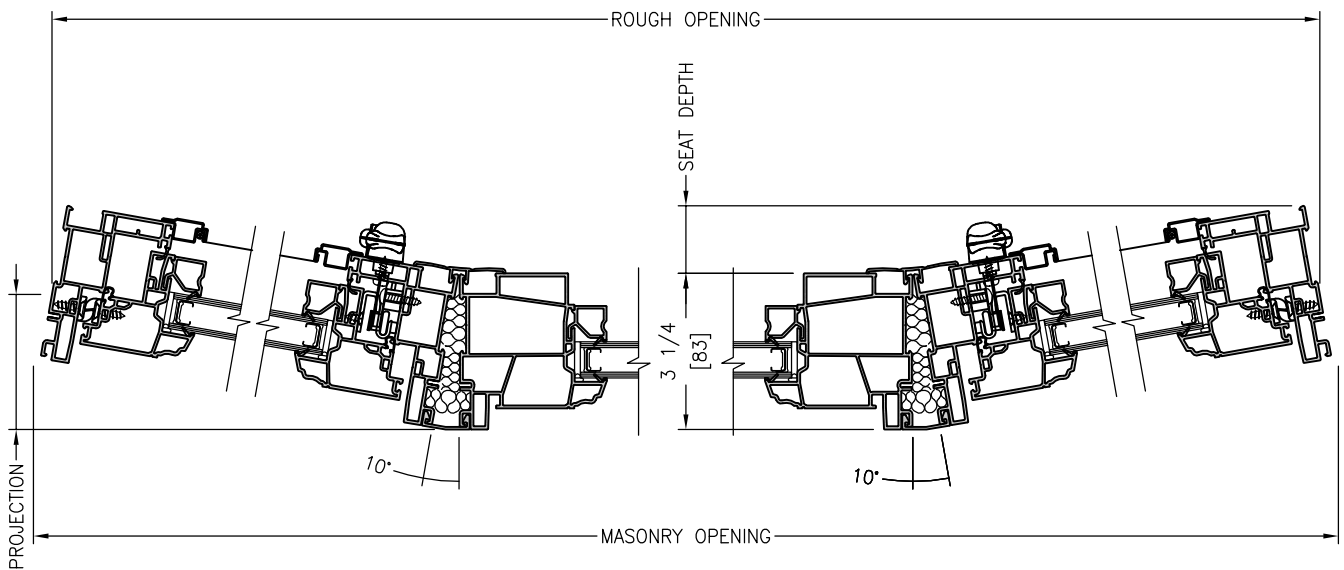


3-WIDE 10° BOW WINDOW
HORIZONTAL SECTION
(SHOWN)


4-WIDE 10° BOW WINDOW
HORIZONTAL SECTION

5-WIDE 10° BOW WINDOW
HORIZONTAL SECTION


SCALE: 6" = 1'-0"

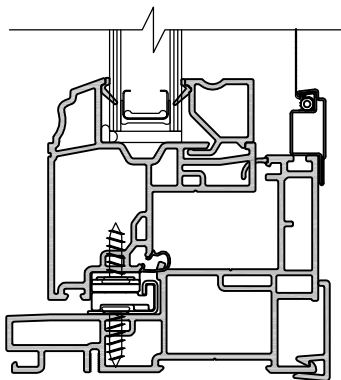


INTERIOR SLOT COVER

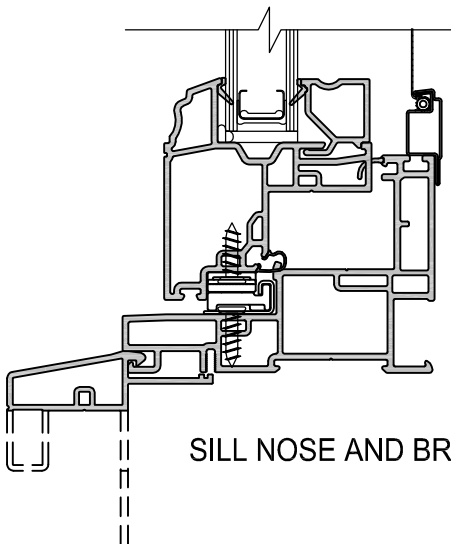


SILL NOSE AND BRICKMOULDS

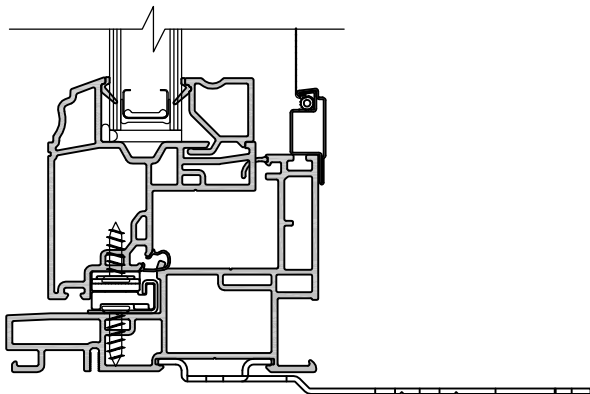


MASONRY CLIP

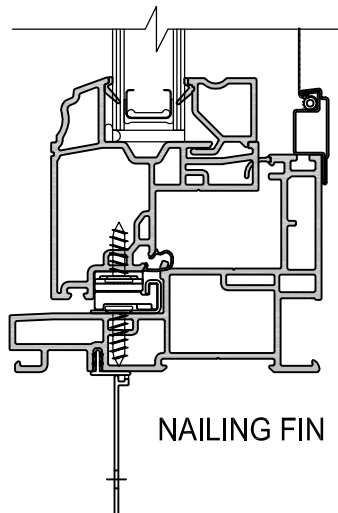

NAILING FIN

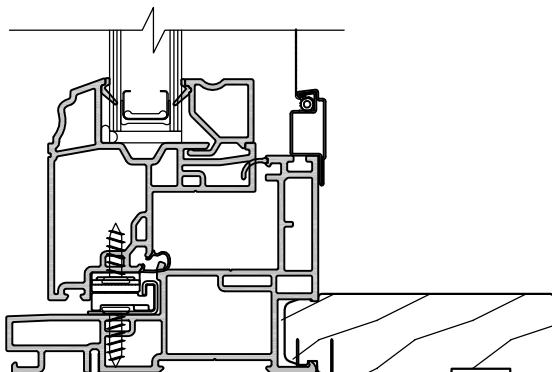

JAMB EXTENSIONS

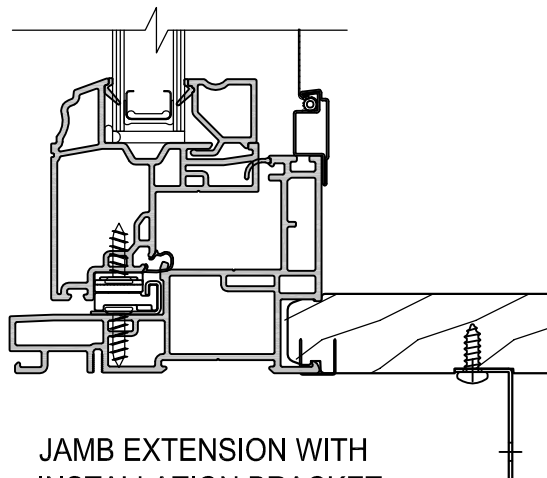

JAMB EXTENSION WITH
INSTALLATION BRACKET